



IndigoVision



# FrontLine 2

## Body Worn Video

The IndigoVision FrontLine Body Worn Video is ideal for protecting frontline staff in any industry, with up to 14 hours of evidential quality HD video and audio recording, easy on/off switch, up to 96 hours battery standby and multiple mounting options.

### Key Features

SENSOR	
COMPRESSION	
OTHER	
PHYSICAL	


### Product Codes

FrontLine Cameras	Product Code
FrontLine 2	110431
FrontLine 2 Plus	110433
FrontLine Dock	Product Code
FrontLine 2 Dock	110417
FrontLine Dock Controller	Product Code
FrontLine Dock Controller	110415


Mounts & Accessories	Product Code
Klick Fast Stud (Camera side Fixing)	110436
Klick Fast Tilt Mount (Camera side Fixing)	110437
Quick Release Sports Camera Pillar (Camera Side Fixing)*	110418
Replacement Quick Release Base (Camera Side Fixing)	110419
Crocodile Uniform Clip (Camera Side Fixing)	110438
Klick Fast Screw-On	110403
Klick Fast Radio Loop	110404
Klick Fast 3-Point Chest Harness	110405
Klick Fast 4-Point Chest Harness	110406

\* Enables FrontLine 2 devices to be compatible with GoPro mounts and other third parties.

## Dimensions - FrontLine 2

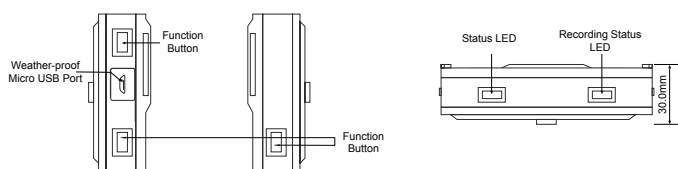


View on Right Side View on Left Side View on Top Face




View on Front Face

## Dimensions - FrontLine 2 Plus

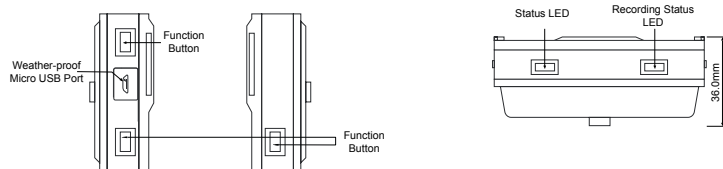

View on Left Side View on Right Side View on Top Face



View on Back Face

## Specification

Camera Features	FrontLine 2	FrontLine 2 Plus
Front Display Message	Options: Display card with message / logo	
Recording	Switch On/Off, with a configurable pre-record period	
View Angle	Horizontal view angle 130°	
Active Pixels (HxV)	1MP (1280 x 720)	
Minimum Sensitivity	1 Lux (Colour)	
Video Resolution	HD: 1280x720 SD: 640x368	
Video Security	AES 256 encrypted keys specific to base station. Recordings can only be retrieved at the base station	
Frame Rates	30fps/25fps/15fps/12.5fps	
Recording Capacity	16 hours @ SD resolution or 8 hours @ HD resolution	28 hours @ SD resolution or 14 hours @ HD resolution
Recording Status User Notification	Visual recording light and audible bleep to notify user of recording on / off	
Storage Media	16GB internal solid state	32GB internal solid state
Onscreen Display	Device ID, Date and Time (UTC), Universal time clock, Frame count number	
Digital Watermarking	Check-sums and watermarked evidential outputs	
Audio Capture	Standard audio configuration is near field capture with background noise reduction	
Audit Log	Usage, operations and recording details all logged and indexed	
Battery Capacity	Up to 8 hours recording / 48 hours standby	Up to 14 hours recording / 96 hours standby
Battery Type	Lithium polymer with overcharge protection and battery level indication, not user replaceable	
Battery Life	Up to 3 years recommended refresh time	
Battery Recharging Times	FrontLine Dock: 4 hours; USB: 4 hours	FrontLine Dock: 8 hours; USB: 8 hours
Battery Overcharge Protection	The camera can be left in the docking station as it cannot be overcharged	
Warranty	1 year return-to-manufacturer warranty including email and telephone support	
Time	Embedded real time clock, with time synchronisation when docked	
Dimension/Weight	30.0mm (d) x 84.0mm (w) x 62.0mm (h) and 100g	36.0mm (d) x 84.0mm (w) x 62.0mm (h) and 140g
Regulatory	EN55022: 2010 (Class B), EN55024: 2010, CFR47 Part 15 subpart B (Class B), EN 60068-2-1 & 2, EN 60068-2-30, EN 60068-2-6 & 64, EN 60068-2-29	
Housing	Impact resistant polycarbonate/ABS	
Protection Rating	IP54	
Operating Temperature	-20°C to 50°C. Charging Temperature 0°C to 30°C	
IndigoVision Software Requirements	Control Center v13.2 or later FrontLine Manager v6.1	
<b>FrontLine 2 Dock Features</b>		
Capacity	14 slots for Frontline 2 or FrontLine 2 Plus	
Interface	USB 2.0	
Dimensions/Weight	436mm (d) x 200mm (w) x 35.0mm (h) and 2.0Kg	
Regulatory	EN55022: 2010 (Class B), EN55024: 2010, CFR47 Part 15 subpart B (Class B)	
Power Requirement	12V 5A PSU, input 100-240V (PSU supplied)	
<b>FrontLine Dock Controller Features</b>		
Capacity	Connection of up to 6 FrontLine Docks, up to a max of 84 cameras	
Interface	Six USB 2.0 ports for connection of FrontLine Dock, one gigabit Ethernet Port 10/100/1000 BaseT	
Dimensions/Weight	154.5mm (d) x 135.5mm (w) x 37.0mm (h) and 660g	
Regulatory	EN55022: 2010 (Class B), EN55024: 2010, CFR47 Part 15 subpart B (Class B)	
Power Requirement	12V 5A PSU, input 100-240V (PSU supplied)	