


Slimline Electro-Magnetic Locks (Grade 2)



The Deedlock slimline range of mini Electro-magnetic locks have been fully tested to TS010:2016 and meet the requirements of grade 2 holding force. The comprehensive system of low profile magnets are suitable for secondary security or low to medium security on internal doors.

The range includes single and double Electro-magnetic locks with door status monitoring and is available with a time delay, which can be set via adjustments on the PCB from 0-90 seconds.

A number of accessories are available, including; Z & L brackets for inward opening doors, L bracket for outward opening doors, brackets for glass fixing and flush and surface mounting armature plate holders.

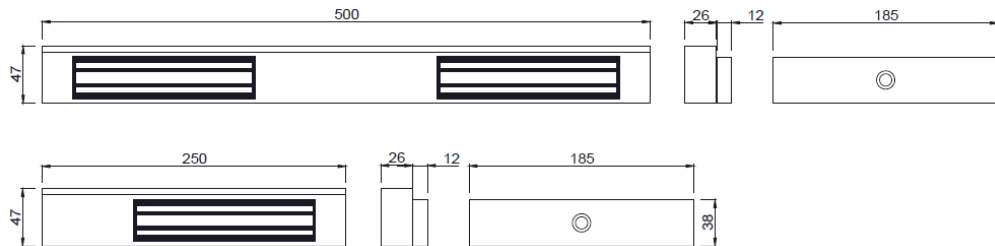

Features & Benefits

- CE marked
- Low maintenance with no moving parts
- Safety bolts prevent the magnet from detaching from the bracket itself
- Dual voltage 12 / 24V DC (Selectable on site)
- Suitable for single or double doors, Inward or outward opening
- Time delay option available
- Satin anodised aluminium finish
- For medium usage traffic applications
- Minimum Holding Force:
Grade 2 - 2000N (203kgf / 450lbf)
- Tested Holding Force:
2090N (470lbs/f) (213 kg/f)

Certification

TS010:2016 – Report Number WTE-16-030

Classification Code:

Monitored 3-7-B-1-3-2-2-A

Unmonitored 3-7-B-1-3-2-0-A

Fire rated to EN1634-1 on Timber Doors for 30 & 60 minutes when used with SINAEM1 Intumescent Sleeve

EN61000-6-3:2007 + A1:2011

EN61000-6-1:2007

CE Marked