


## SBI-RM/D

### Dome swivel arm roof mounted bracket

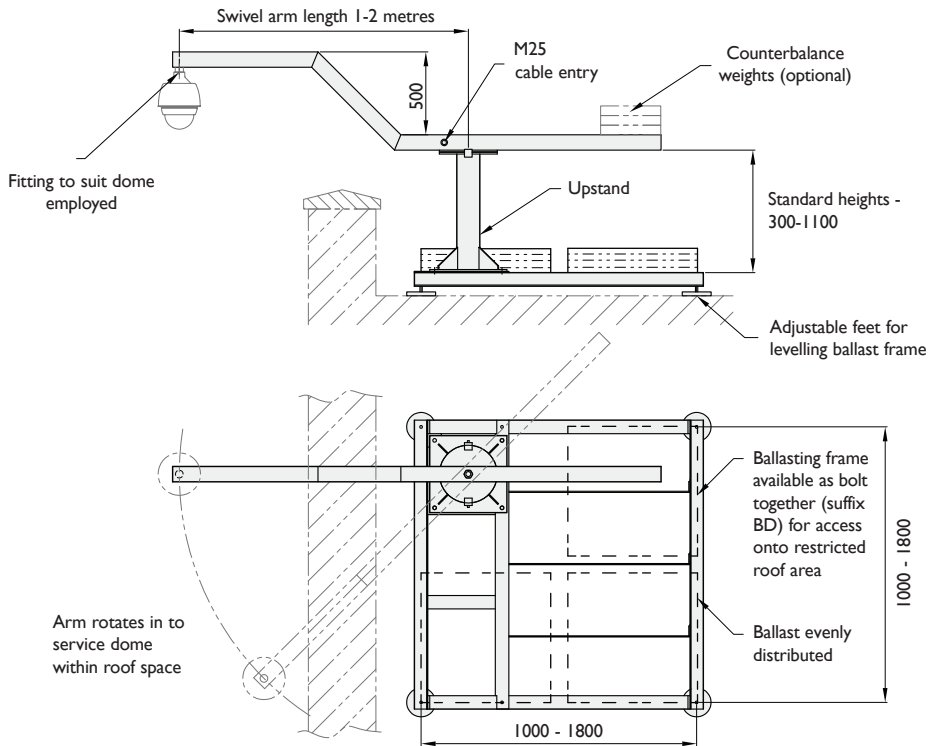

Arm Length	Pt No.
1m	● <b>SBI-1000RM/D</b>
1.2m	● <b>SBI-1200RM/D</b>
1.5m	● <b>SBI-1500RM/D</b>
2m	● <b>SBI-2000RM/D</b>

#### Upstand Heights Available


- 300 mm (supplied as standard)
  - 600mm
  - 1100mm
- Other sizes made to order

- Max. camera load 15kgs / 0.15m<sup>2</sup>
- Typical ballast amount 100 - 320kgs depending on arm length, post height, location and roof height above ground level
- Fittings provided for all dome types - please specify when ordering
- Also available with bolt together frame (suffix /BD) for access onto restricted roof areas. (/BD standard on 1500 + 1800 frames, refer to website for full part no. list)

● Stock items

## SBI-PM/D

### Dome swivel arm parapet mounting bracket

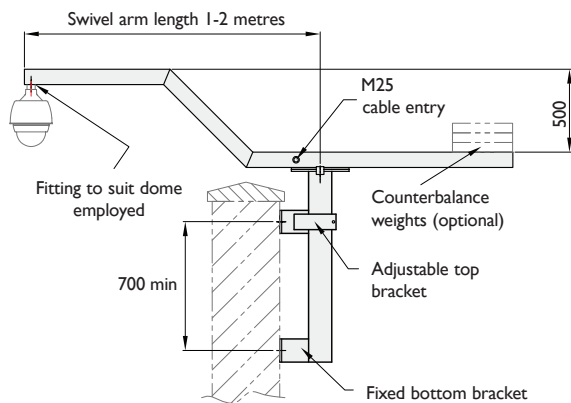

- Parapets must be of solid construction, ideally pre-cast concrete or steel-framed
- For brick built parapets, single skin construction is not suitable
- Parapets where the brickwork is not in good condition are not suitable
- The minimum parapet height is 1100mm
- The product head load must not be exceeded
- In cases where a greater head load is proposed, Altron must be contacted and suitable advice should be sought regarding parapet construction and strength



Arm Length	Pt No.
<b>Flat Parapet Mount</b>	
1m	● <b>SBI-1000PM/D</b>
1.2m	● <b>SBI-1200PM/D</b>
1.5m	● <b>SBI-1500PM/D</b>
2m	● <b>SBI-2000PM/D</b>
<b>Corner Parapet Mount</b>	
1m	● <b>SBI-1000PMC/D</b>
1.2m	● <b>SBI-1200PMC/D</b>
1.5m	● <b>SBI-1500PMC/D</b>
2m	● <b>SBI-2000PMC/D</b>

- Fittings provided for all dome types - please specify when ordering
- Max. camera load 15kgs / 0.15m<sup>2</sup>

## SBI-PMC/D

### Corner mount option

Arm rotates in to services dome within parapet

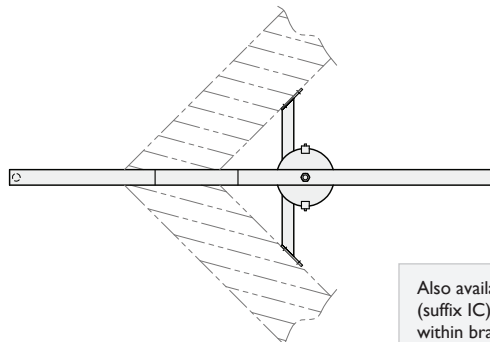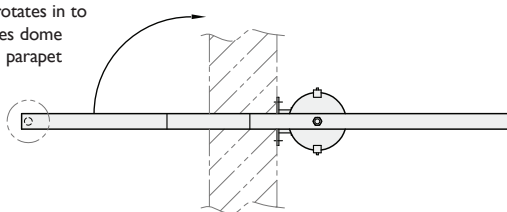

Also available with internal cable way (suffix IC) so that cabling is concealed within bracket